


## SI - fuel hose with external steel braid

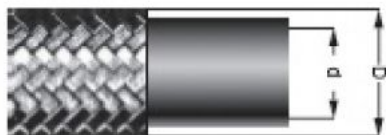

**Application**  
**Standard**  
**Inner layer**  
**Insert**  
**Outer layer**  
**Colour**  
**Temp. min.**  
**Temp. max.**  
**Media**

Low pressure hose for fuel lines  
 DIN EN ISO 6806  
 oil resistant synthetic rubber  
 one zinc plated steel wire braided insert  
 none  
 metallic  
 -35 °C  
 80 °C  
 Diesel  
 Crude oil  
 Lubricating oil  
 not suitable for petrol fuels

Name	DN	d	D	Ciśn. rob. (bar)	Ciśnienie testowe	Ciśn. rozrywające (bar)	R. min.
SI102	2	3,5	8,5	32	48	80	25
SI103	3	4,5	9,5	30	45	75	25
SI104	4	5,5	10,5	30	45	75	25
SI106	6	7,5	12,5	24	36	60	30
SI108	8	9,5	15,0	20	30	50	40
SI110	10	11,0	17,5	20	30	50	45
SI113	13	14,0	21,5	18	27	45	50
SI116	16	17,5	26,0	14	21	35	70
SI120	20	20,5	32,0	14	21	35	90
SI125	25	24,0	35,0	12	20	35	150