


SI - fuel hose with external steel braid

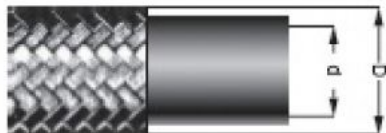

Application
Standard
Inner layer
Insert
Outer layer
Colour
Temp. min.
Temp. max.
Media

Low pressure hose for fuel lines
 DIN EN ISO 6806
 oil resistant synthetic rubber
 one zinc plated steel wire braided insert
 none
 metallic
 -35 °C
 80 °C
 Diesel
 Crude oil
 Lubricating oil
 not suitable for petrol fuels

Name	DN	d	D	Ciśn. rob. (bar)	Ciśnienie testowe	Ciśn. rozrywające (bar)	R. min.
SI102	2	3,5	8,5	32	48	80	25
SI103	3	4,5	9,5	30	45	75	25
SI104	4	5,5	10,5	30	45	75	25
SI106	6	7,5	12,5	24	36	60	30
SI108	8	9,5	15,0	20	30	50	40
SI110	10	11,0	17,5	20	30	50	45
SI113	13	14,0	21,5	18	27	45	50
SI116	16	17,5	26,0	14	21	35	70
SI120	20	20,5	32,0	14	21	35	90
SI125	25	24,0	35,0	12	20	35	150