


## Manual pump PM

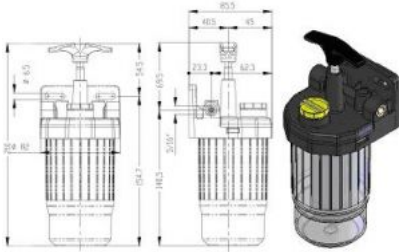

lubricating medium - 50 + 220 cSt, 40 °C

max. pressure - 3 bar

temp. - -10 to 60 °C

integrated filter - 3 Pm

tank capacity - 500 cm<sup>3</sup>

Output connector - 5/16" (f)

Name	Typ
00.115.0	2 cm <sup>3</sup> /ruch tłoka
00.115.1	6 cm <sup>3</sup> /ruch tłoka
00.115.2	10 cm <sup>3</sup> /ruch tłoka